

# TUBOS CHANDELIER turnlights



## **TUBOS CHANDELIER**


### ***Where simplicity becomes supreme elegance***

Un'architettura luminosa sospesa, composta da un insieme di cilindri che scendono con precisione geometrica, come colonne d'ombra che custodiscono una luce discreta ma intensa. Il suo design è un inno al minimalismo più sofisticato: ogni elemento verticale è sapientemente bilanciato, creando un volume scultoreo e dinamico, capace di dialogare con lo spazio in modo sobrio e potente al tempo stesso. Tubos è pensato per ambienti che aspirano all'essenzialità più colta: gallerie d'arte, residenze d'autore, spazi contract esclusivi.


[info@turnlights.it](mailto:info@turnlights.it) / [turnlights.com](http://turnlights.com)

*This suspended, luminous architecture is composed of a series of descending cylinders that, like columns of shadow, conceal a discreet but intense light. The design is a hymn to sophisticated minimalism: each vertical element is balanced with precision, creating a sculptural and dynamic form that engages with the space in a powerful yet understated way. Tubos is designed for environments that aspire to the most cultured essentiality, such as art galleries, designer residences and exclusive contract spaces.*

**MADE IN ITALY**

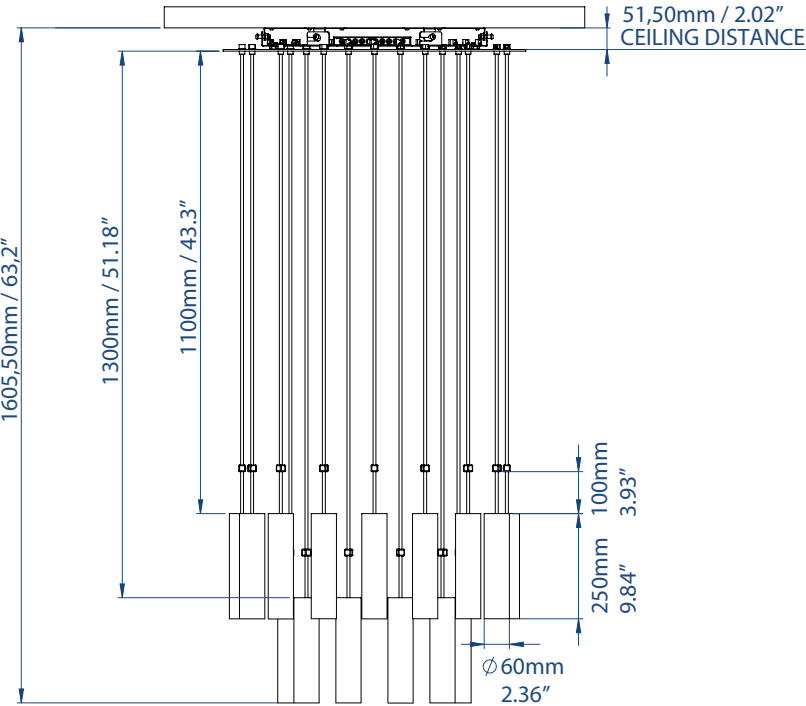


VISTA DAL BASSO  
BOTTOM VIEW

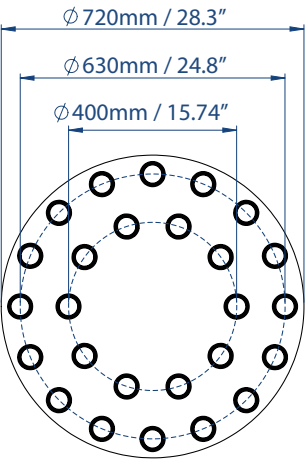

CARATTERISTICHE / FEATURES

|                                              |                                                                                         |
|----------------------------------------------|-----------------------------------------------------------------------------------------|
| tipo di installazione<br>type of intallation | sospeso<br>suspended                                                                    |
| materiali<br>materials                       | corpo in alluminio, piastra a soffitto in acciaio<br>aluminum body, steel ceiling plate |
| dimensioni complessive<br>overall dimensions | 720x1605,5mm / 28,34x63,2"                                                              |
| peso<br>weight                               | ---                                                                                     |
| fascio<br>beam angle                         | ---                                                                                     |
| finiture<br>finishes                         | vasta gamma di finiture disponibili a catalogo<br>wide range of finishes available      |

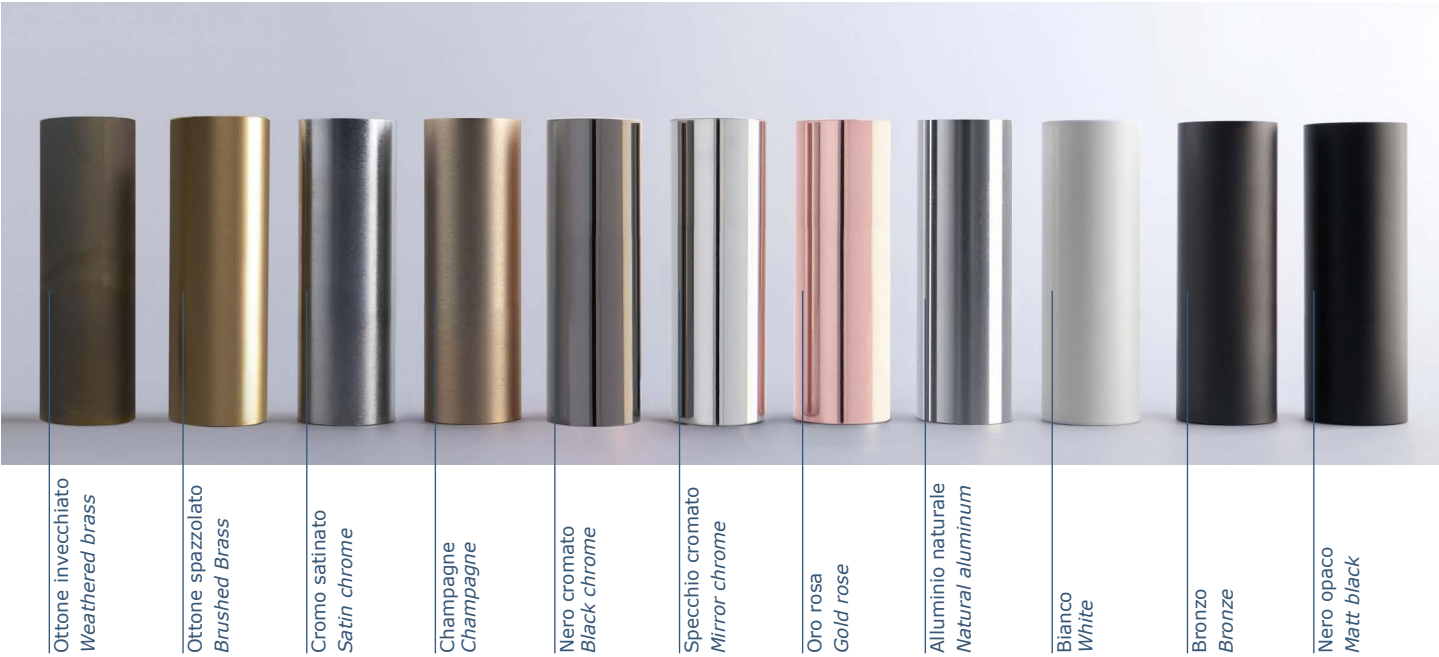

**SPECIFICHE ELETTRICHE / ELECTRICAL DATA**

Volt  
*voltage* 130Volt 60Hz

dimmerazione  
*dimming* ---

**SORGENTE LUMINOSA / LIGHT SOURCE**

tipo di fonte  
*type of source* GU10 (**not included**)

potenza  
*power* depend on the chosen lighting source

flusso luminoso  
*luminous flux* depend on the chosen lighting source

intensità  
*peak intensity* depend on the chosen lighting source

temperatura di colore  
*color temperature* depend on the chosen lighting source

fidelity index (Rf) depend on the chosen lighting source

gamut index (Rg) depend on the chosen lighting source

selezione cromatica  
*chromatic selection* depend on the chosen lighting source

lifetime depend on the chosen lighting source

**CERTIFICAZIONI / CERTIFICATIONS**

IP 20 CLASSE II CEI 34-21



**MADE  
IN  
ITALY**


**TRANSPORT CONDITIONS:** Ambient temperature 0°C - +35°C; Relative Humidity 5% - 70% Rh.  
**STORAGE CONDITIONS:** 0°C - 40°C; Humidity relative 5%-70% Rh, No dew, No Water spray. Recommended storage Temp is: 25°C with Humidity <65% Rh.  
**OPERATIONAL ENVIRONMENTAL CONDITIONS:** Ambient temp : +5°C - 35°C Relative Humidity : 20% - 75% Rh

*il materiale non può essere modificato, copiato, riprodotto o trasferito, né utilizzato in maniera impropria /  
the material can not be modified, copied, reproduced or transferred neither used improperly*


**info@turnlights.it / turnlights.com**  
REVISIONE / REVISION 11/2024  
soggetto a modifiche senza preavviso  
subject to change without prior notice

## ACCESSORI / ACCESSORIES

Micro connettore M/F antistrappo - 28xØ9mm - 24Volt  
Micro plug connector M/F tearproof - 28xØ9mm - 24Volt





Collegamento a raccordo fisso  
Hardwire connection




Drivers  
(standard driver 24 Volt / DALI / 1-10V / DMX/RMX)

lep / lep DALI  
(USA only)

## INDICAZIONI INSTALLAZIONE / INSTALLATION DIRECTIONS

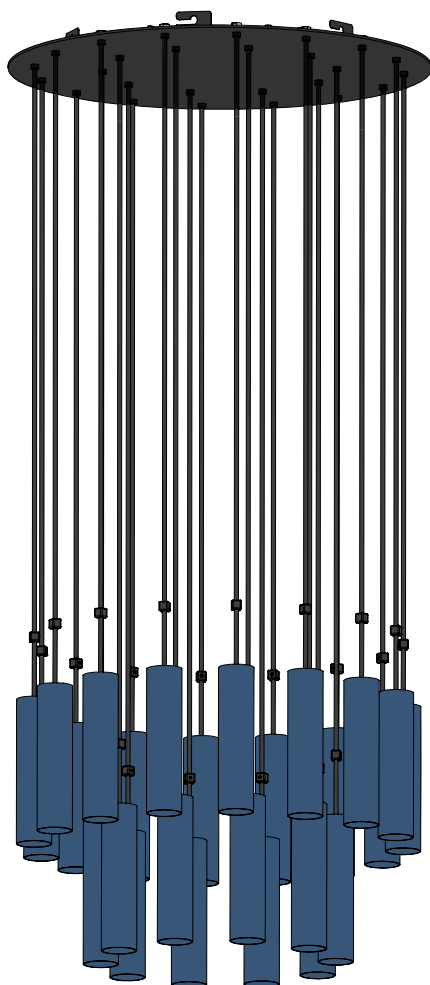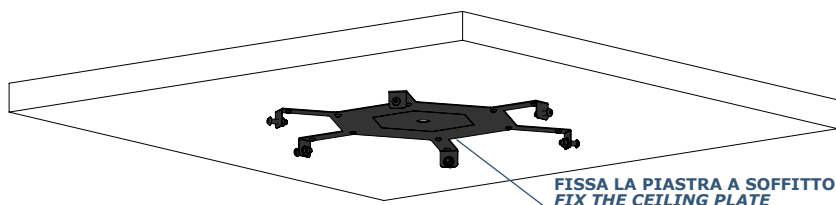

**RUOTA E BLOCCA**  
**TWIST AND LOCK**

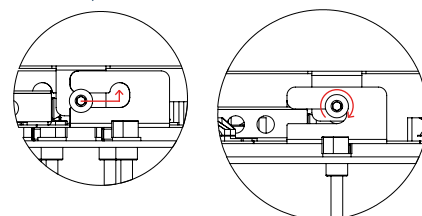

**TRANSPORT CONDITIONS:** Ambient temperature 0°C - +35°C; Relative Humidity 5% - 70% Rh.  
**STORAGE CONDITIONS:** 0°C - 40°C; Humidity relative 5%-70% Rh, No dew, No Water spray. Recommended storage Temp is: 25°C with Humidity <65% Rh.  
**OPERATIONAL ENVIRONMENTAL CONDITIONS:** Ambient temp : +5°C - 35°C Relative Humidity : 20% - 75% Rh

*il materiale non può essere modificato, copiato, riprodotto o trasferito, né utilizzato in maniera impropria /  
the material can not be modified, copied, reproduced or transferred neither used improperly*

**info@turnlights.it / turnlights.com**

REVISIONE / REVISION 11/2024  
soggetto a modifiche senza preavviso  
subject to change without prior notice