

LOGIC LINEAR



Based on the principles of the Logic 190 R, the Logic Linear range extends versatility with linear uplighting options for multiple applications. Perfect as a single fixture or in a continuous line, it is the ideal solution for illuminating facades or architectural features.

Specification	
Floor Cut-out:	18"-7/8 x 5"-15/16 or 36"-1/4 x 5"-15/16
Adjustability:	Fixed
Rating:	IP67

Performance	440	880
LED Maintenance:	L80 > 150,000	
McAdam Steps:	3	
CRI:	90	
*SP:	17W	33W

Delivered Lumens	3000K			
**See page 2 for full details	NS	MS	MD	WG
440 No Accessory:	133Lm	1272Lm	1200Lm	1028Lm
440 With Accessory:	751Lm	729Lm	702Lm	813Lm
880 No Accessory:	2662Lm	2544Lm	2400Lm	2056Lm
880 With Accessory:	1503Lm	1458Lm	1405Lm	1627Lm

Listing

ETL certified to US and Canadian safety standards.

Warranty

5-year limited warranty.

Ordering

ALL BOXES MUST BE FILLED IN TO CORRECTLY ORDER

Example: LGC880LA-30SPWGAGFX-GB-RMTD5-120

Luminaire	Size	Shape	Finish	CCT	Power*	Optic**	Accessory	Function	Installation	Application	Controls***
LGC LOGIC	440 486 / 19"-1/8	LA Linear - with Flange	INOX Stainless Steel	27 2700K	SP Standard Power	NS Narrow Spot 15°	X No Accessory	FX Fixed, Exterior use	GB Inground Box	RMT Remote Power Supply	D5-120 Dali dim 120V D14-120 FE ELV dim 120V / 0-10V dim 120-277V
	880 926mm / 36"-7/16		N Anthracite	30 3000K		MS Medium Narrow Spot 25°	H Honeycomb				
				35 3500K		MD Medium Spot 40°					
				40 4000K		WG Wall Grazer	X No Accessory AG Anti Glare Shield				

*** Contact factory for Dali, DMX, or other dimming options.

Related Products

Logic Wallwash, Logic F, Frax, Fragma, Logic, Logic 190

DELTALIGHT


www.deltalight.com



Finish Options


LOGIC LINEAR 440

LOGIC LINEAR 880

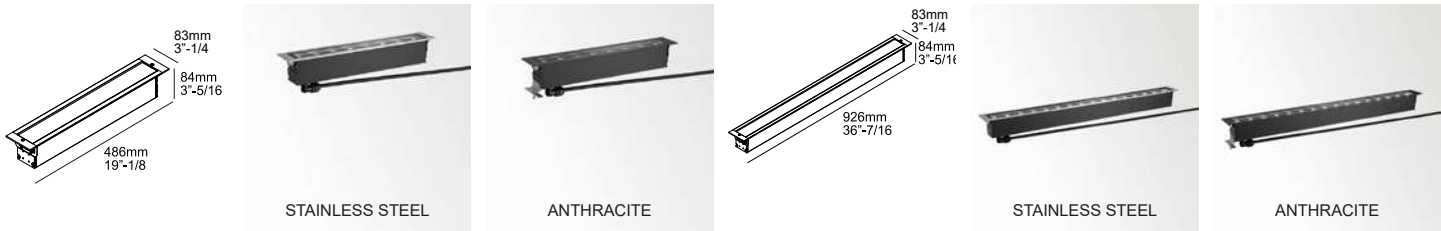

LOGIC LINEAR 440 WG

LOGIC LINEAR 880 WG

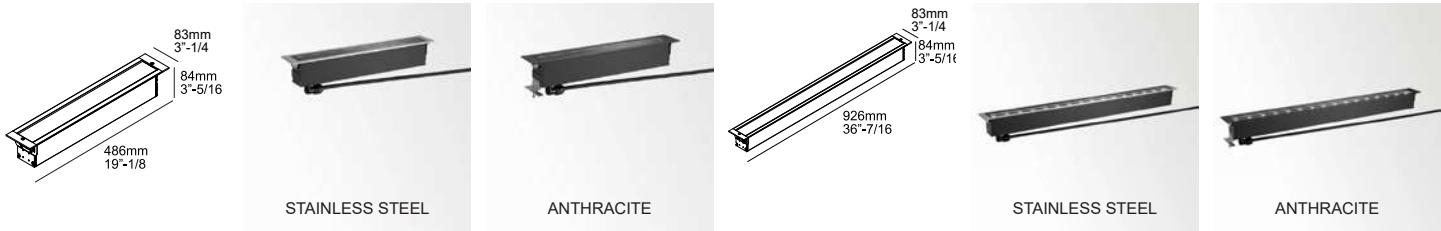


FINISHES



GB - LOGIC LINEAR 440 BOX

GB - LOGIC LINEAR 880 BOX

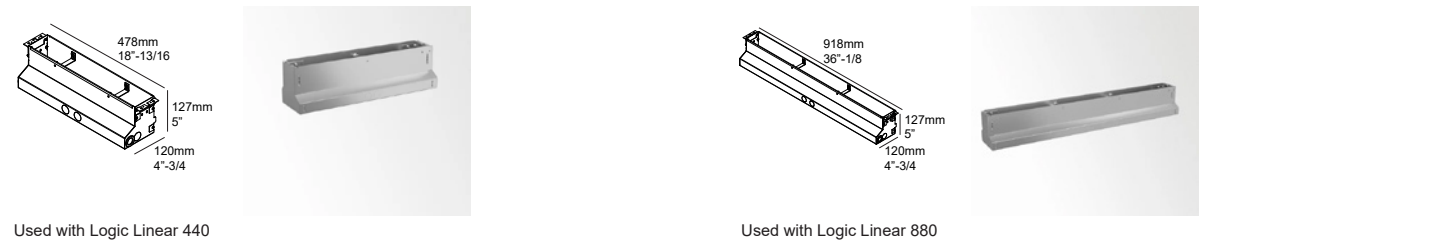

Photometric Data

Delivered Lumens	Optic	Accessory	2700K	3000K	3500K	4000K
Logic Linear 440	15°	No	1217lm	1331lm	1387lm	1442lm
		Honeycomb	687lm	751lm	783lm	814lm
	25°	No	1163lm	1272lm	1325lm	1378lm
		Honeycomb	666lm	729lm	759lm	790lm
	40°	No	1097lm	1200lm	1251lm	1301lm
		Honeycomb	642lm	702lm	732lm	761lm
	Wallgrazer	No	940lm	1028lm	1071lm	1114lm
		Anti Glare Shield	743lm	813lm	848lm	881lm
Logic Linear 880	15°	No	2433lm	2662lm	2773lm	2885lm
		Honeycomb	1374lm	1503lm	1566lm	1629lm
	25°	No	2325lm	2544lm	2650lm	2757lm
		Honeycomb	1332lm	1458lm	1518lm	1580lm
	40°	No	2194lm	2400lm	2501lm	2601lm
		Honeycomb	1284lm	1405lm	1463lm	1522lm
	Wallgrazer	No	1879lm	2056lm	2142lm	2228lm
		Anti Glare Shield	1487lm	1627lm	1695lm	1763lm

LOGIC LINEAR 440 / 880

