



dry location rated table, floor-standing, table and wall light fitting for indoor use.
made of aluminium and steel.

versions:

roy lettura diffusa and roy lettura spot are made of a 97x38mm/3.8x1.5" light diffuser, adjustable by 270° on the horizontal axis and by 180° on the vertical axis, a Ø8mm/0.3" rod, adjustable by 180° on the vertical axis, 120x241x10mm/4.7x9.5x0.4" steel base with support which contains the on/off touch sensor.
120V 50-60Hz power supply with plug included.

roy parete diffusa and roy parete spot are made of a 97x38mm/3.8x1.5" light diffuser, adjustable by 270° on the horizontal axis and by 180° on the vertical axis, a Ø8mm/0.3" rod, adjustable by 180° on the vertical axis and fastened to a 120x60x20mm/4.7x2.4x0.8" support for wall mounting which contains the on/off touch sensor.

constant voltage power supply not included to be installed remotely.



roy tavolo diffusa and roy tavolo spot are made of a 97x38mm/3.8x1.5" light diffuser, adjustable by 270° on the horizontal axis and by 180° on the vertical axis, a Ø8mm/0.3" rod, adjustable by 180° on the vertical axis, 120x120x5mm/4.7x4.7x0.2" steel base with support which contains the on/off touch sensor.

120V 50-60Hz power supply with plug included.

wired with 3000K 6W 576lm led source equipped with a frosted polycarbonate diffuser for diffused light, 3000K 2.2W 148lm led source, 15° optics spot light.


finishes: nero55, copper bronze.



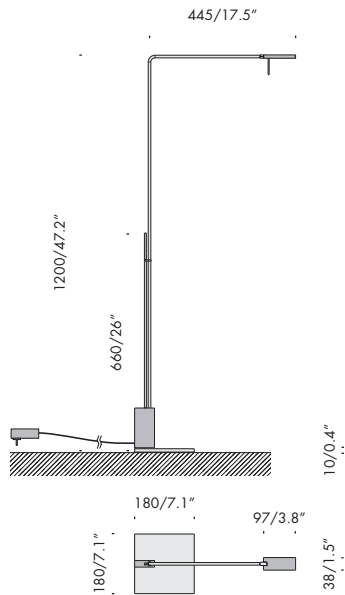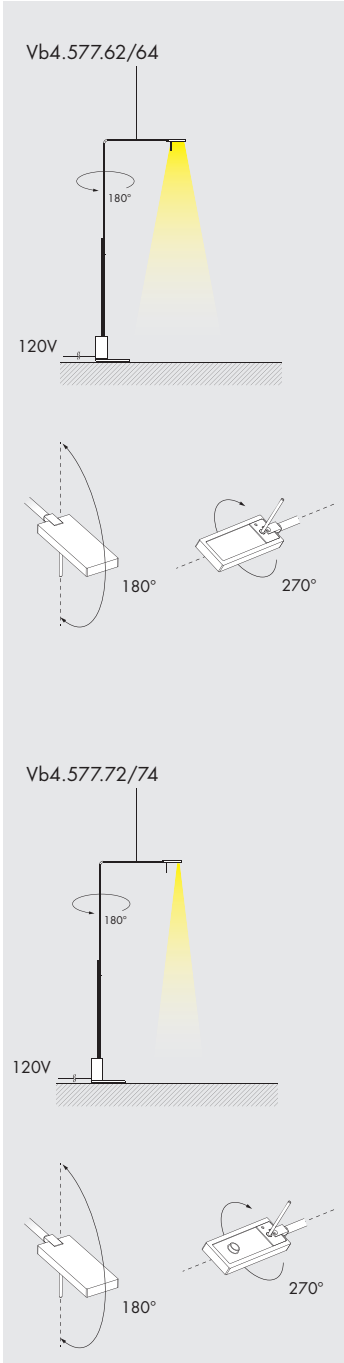


roy lettura diffusa		120V 50-60Hz	A	dry			
Vb4.577.62	nero55	3000K	7kg	15.4lb			
Vb4.577.64	copper bronze	3000K	7kg	15.4lb			

Ra	R9	ies tm-30		sdc	m	V _f	lm	W	lm/W	
95	90	Rf 93	Rg 102	step 2		24,0	576	6	96	A+
Vz081		Ta25 °C		vita media · average life		50000 h		L80 B10		

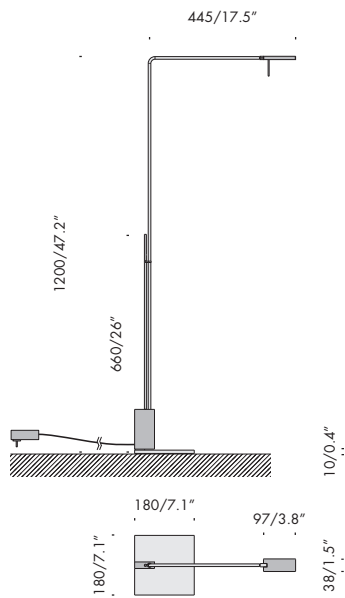





roy lettura spot		120V 50-60Hz	A	dry			
Vb4.577.72	nero55	3000K	7kg	15.4lb			
Vb4.577.74	copper bronze	3000K	7kg	15.4lb			

Ra	ies tm-30		sdc	m	A	V _{f (min)}	lm	W	lm/W	
90	Rf 90	Rg 100	step 2	700	3,0	148	2,2	70	A+	
ca021	les2	Ta25 °C		vita media · average life		50000 h		L70 B10		

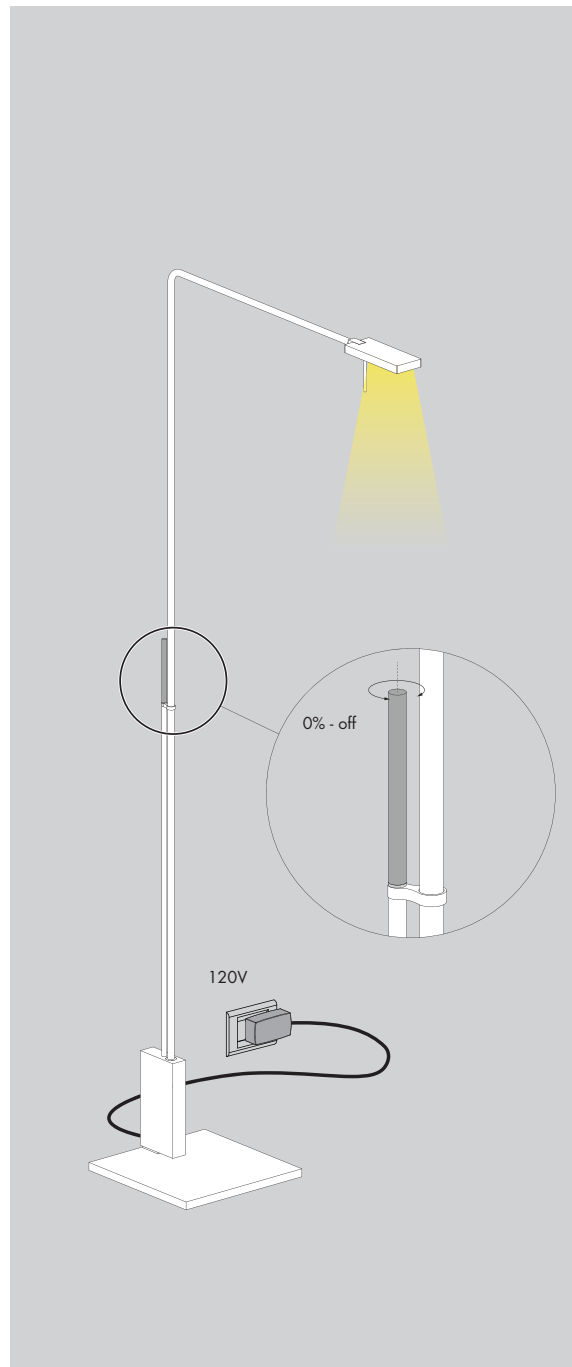





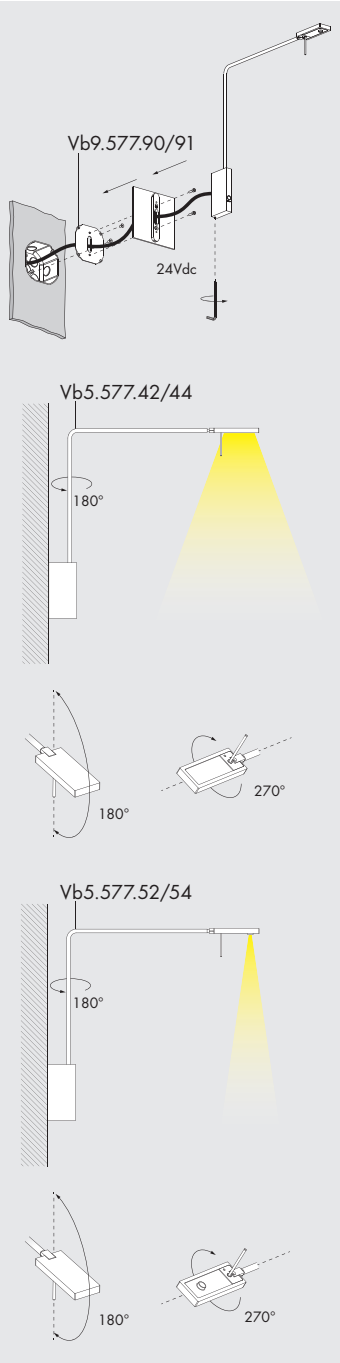

roy parete diffusa		24Vdc		damp			
--------------------	--	-------	---	------	---	---	---

Vb5.577.42	nero55	3000K	1,5kg
			3.3lb
Vb5.577.44	copper bronze	3000K	1,5kg
			3.3lb

Ra	R9	ies tm-30	sdc	V _f	Im	W	Im/W	
95	90	Rf 93 Rg 102	step 2	24,0	576	6	96	A+
Vz081	Ta25 °C		vita media · average life	50000 h	L80	B10		

roy parete spot		24Vdc		damp			
-----------------	--	-------	---	------	---	---	---

Vb5.577.52	nero55	3000K	1,5kg
			3.3lb
Vb5.577.54	copper bronze	3000K	1,5kg
			3.3lb

Ra	ies tm-30	sdc	mA	V _{f (min)}	Im	W	Im/W	
90	Rf 90 Rg 100	step 2	700	3,0	148	2,2	70	A+
ca021	les2	Ta25 °C	vita media · average life	50000 h	L70	B10		

copertura per outlet box. cover for outletbox.			
--	--	---	---

Vb9.577.90	nero55	0,5kg
		1.1lb
Vb9.577.91	copper bronze	0,5kg
		1.1lb


alimentatori. power supplies.		120 50-60Hz		damp			
-------------------------------	--	-------------	---	------	---	---	---

t4.005.1	24V	25W	0,3kg
			0.7lb







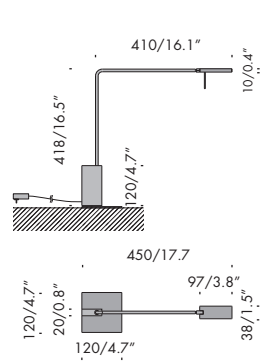

roy tavolo diffusa 120V 50-60hz **AS** dry

Vb2.577.02 nero55 3000K 2,9kg
6.4lb

Vb2.577.04 copper bronze 3000K 2,9kg
6.4lb

Ra	R9	ies tm-30		sdc	V _f	lm	W	lm/W	
95	90	Rf 93	Rg 102	step 2	24,0	576	6	96	
Vz081	Ta25 °C vita media · average life 50000 h L80 B10								

roy tavolo spot 120V 50-60hz **AS** dry

Vb2.577.12 nero55 3000K 2,9kg
6.4lb

Vb2.577.14 copper bronze 3000K 2,9kg
6.4lb

Ra		ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
90		Rf 90	Rg 100	step 2	700	3,0	148	2,2	70	
ca021	les2	Ta25 °C		vita media · average life		50000 h		L70 B10		

