



apparecchio di illuminazione a sospensione per interni realizzato in alluminio ossidato.

damp locaiton rated suspension light fi tting for indoor use, made of oxidised aluminium. consisting of a 1100mm/43.3'' or 2600mm/102.3'' internally electrifi ed leather belt which is connected to the diffuser by means of a cable with "underskin" connector.

versions:

sul, with an extra-clear glass sphere diameter Ø175mm/6.8'', a metal disc diameter Ø255mm/8.8'' and a transparent crystal diffuser, available with rose version diameter Ø55 h.270mm or fully concealed version,

sole, with an extra-clear glass bulb diameter Ø234mm/9.2'' and a transparent crystal diffuser on the side, available with rose version diameter Ø55mm/2.1'' h.270mm/10.6'' or fully concealed version,

va, consisting of metal bell diameter Ø55mm/2.1'' for accent light, available with rose version diameter Ø55mm/2.1'' h.270mm/10.6'' or fully concealed version,

wired with 2700K Ra95 6.8W 433lm led source.

120V 50-60Hz power supply included in the rose versions diameter Ø55mm/2.1''


h.270mm/10.6''. power supply not included to be installed remotely in the fully concealed

versions.

fi nishes: satin brass.





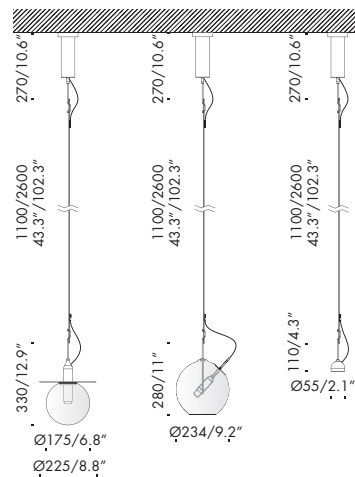

sul sole va	120V 50-60Hz	A	damp	
-------------	--------------	---	------	--

Via.621.0001.u black leather electrifiedbelt 2700K 3x6,8W 1100mm 2,5kg
Via.621.0002.u Soft Taupe leather electrifiedbelt 43.3" 5.5lb


2700K 3x6,8W 1100mm 2,5kg
43.3" 5.5lb

Via.621.0003.u black leather electrifiedbelt 2700K 3x6,8W 2600mm 2,8kg
Via.621.0004.u Soft Taupe leather electrifiedbelt 102.3" 6.1lb

2700K 3x6,8W 2600mm 2,8kg
102.3" 6.1lb

Ra	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
95	Rf 92	Rg 100	step 2	350	19,3	433	6,8	64	A
cd030	les6	Ta25 °C	vita media · average life	50000 h	L80	B10			



Please note this is a set of three



copertura per outlet box. cover for outlet box	
--	--

Vb9.000.01.u Trimless adapter required to cover North american junction box fully concealed for plasterboard installation 0,3kg 0.7lb



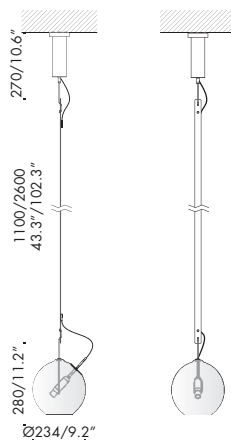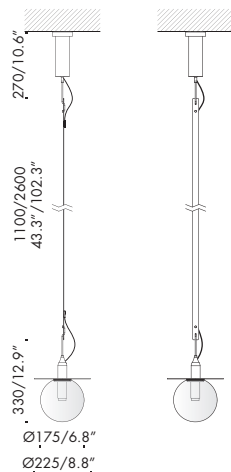


sul	120V 50-60Hz	A	damp		i
Vb8.621.01.27.u	black leather electrified belt and glass sphere with plate	2700K 6,8W	1100mm 43.3"	1,4kg 3lb	
Vb8.621.02.27.u	soft Taupe leather electrified belt and glass sphere with plate	2700K 6,8W	1100mm 43.3"	1,4kg 3lb	
Vb8.621.03.27.u	black leather electrified belt and glass sphere with plate	2700K 6,8W	2600mm 102.3"	1,5kg 3.3lb	
Vb8.621.04.27.u	soft Taupe leather electrified belt and glass sphere with plate	2700K 6,8W	2600mm 102.3"	1,5kg 3.3lb	

Ra	ies tm-30	sdc	mA	V _{f (min)}	lm	W	lm/W	
95	Rf 92 Rg 100	step 2	350	19,3	433	6,8	64	A
cd030	les6 ● Ta25 °C	vita media · average life	50000 h	L80	B10			


sole	120V 50-60Hz	A	damp		i
Vb8.621.21.27.u	black leather electrified belt and glass sphere	2700K 6,8W	1100mm 43.3"	0,8kg 1.7lb	
Vb8.621.22.27.u	soft taupe leather electrified belt and glass sphere	2700K 6,8W	1100mm 43.3"	0,8kg 1.7lb	
Vb8.621.23.27.u	black leather electrified belt and glass sphere	2700K 6,8W	2600mm 102.3"	0,9kg 1.9lb	
Vb8.621.24.27.u	soft taupe leather electrified belt and glass sphere	2700K 6,8W	2600mm 102.3"	0,9kg 1.9lb	

Ra	ies tm-30	sdc	mA	V _{f (min)}	lm	W	lm/W	
95	Rf 92 Rg 100	step 2	350	19,3	433	6,8	64	A
cd030	les6 ● Ta25 °C	vita media · average life	50000 h	L80	B10			

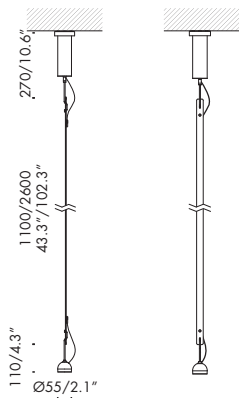


va	120V 50-60Hz	A	damp		i
Vb8.621.41.27.u	black leather electrified belt and metal bell	2700K 6,8W 1100mm 43.3"	0,3kg 0.6lb		
Vb8.621.42.27.u	soft taupe leather electrified belt and metal bell	2700K 6,8W 1100mm 43.3"	0,3kg 0.6lb		
Vb8.621.43.27.u	black leather electrified belt and metal bell	2700K 6,8W 2600mm 102.3"	0,4kg 0.8lb		
Vb8.621.44.27.u	soft taupe leather electrified belt and metal bell	2700K 6,8W 2600mm 102.3"	0,4kg 0.8lb		

Ra	ies tm-30		sdc	mA	V _f (min)	lm	W	lm/W	
95	Rf 92	Rg 100	step 2	350	19,3	433	6,8	64	
cd030	les6	Ta25 °C	vita media · average life		50000 h	L80 B			



copertura per outlet box. cover for outlet box				i
Vb9.000.01.u	Trimless adapter required to cover North american junction box fully concealed for plasterboard installation		0,3kg 0.7lb	



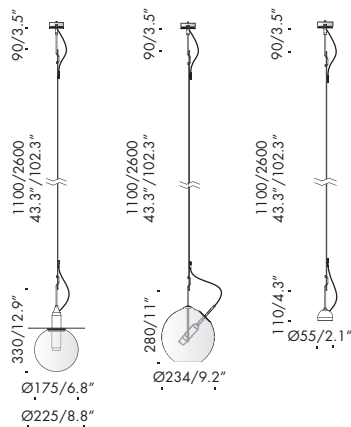

sul sole va	120V 50-60Hz		damp		
-------------	--------------	--	------	--	--


Via.621.0011 black leather electrifiedbelt 2700K 3x6,8W 1100mm 2,3kg 43.3" 5lb

Via.621.0012 soft taupe leather electrifiedbelt 2700K 3x6,8W 1100mm 2,3kg 43.3" 5lb

Via.621.0013 black leather electrifiedbelt 2700K 3x6,8W 2600mm 2,6kg 102.3" 5.7lb

Via.621.0014 soft taupe leather electrifiedbelt 2700K 3x6,8W 2600mm 2,6kg 102.3" 5.7lb


Ra	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
95	Rf 92	Rg 100	step 2	350	19,3	433	6,8	64	A
cd030	les6	Ta25 °C	vita media · average life	50000 h	L80	B10			



copertura per outlet box. cover for outlet box		
--	--	--

Vb9.000.01.u Trimless adapter required to cover North american junction box fully concealed for plasterboard installation 0,3kg 0.7lb



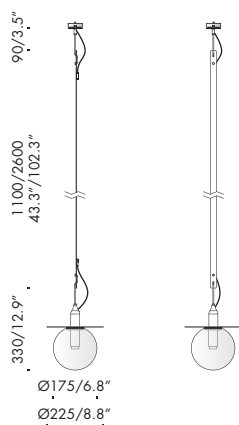


For remote dimable driver

sul			damp		
Vb8.621.11.27	black leather electrified belt and glass sphere with plate	2700K	1100mm 1,3kg 43.3" 2.8lb		
Vb8.621.12.27	soft taupe leather electrified belt and glass sphere with plate	2700K	1100mm 1,3kg 43.3" 2.8lb		
Vb8.621.13.27	black leather electrified belt and glass sphere with plate	2700K	2600mm 1,4kg 102.3" 3lb		
Vb8.621.14.27	soft taupe leather electrified belt and glass sphere with plate	2700K	2600mm 1,4kg 102.3" 3lb		


Ra	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
95	Rf 92	Rg 100	step 2	350	19,3	433	6,8	64	A
cd030	les6	Ta25 °C		vita media · average life		50000 h	L80	B10	

For remote dimable driver

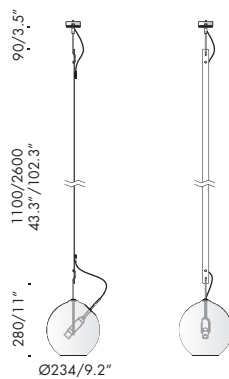

sole			damp		
Vb8.621.31.27	black leather electrified belt and glass sphere	2700K	1100mm 1,3kg 43.3" 2.8lb		
Vb8.621.32.27	soft taupe leather electrified belt and glass sphere	2700K	1100mm 1,3kg 43.3" 2.8lb		
Vb8.621.33.27	black leather electrified belt and glass sphere	2700K	2600mm 1,4kg 102.3" 3lb		
Vb8.621.34.27	soft taupe leather electrified belt and glass sphere	2700K	2600mm 1,4kg 102.3" 3lb		

Ra	ies tm-30		sdc	mA	V _{f (min)}	lm	W	lm/W	
95	Rf 92	Rg 100	step 2	350	19,3	433	6,8	64	A
cd030	les6	Ta25 °C		vita media · average life		50000 h	L80	B10	



For remote dimable driver


va			damp		i
Vb8.621.51.27	black leather electrified belt and metal bell	2700K	1100mm 43.3"	1,3kg 2.8lb	
Vb8.621.52.27	soft taupe leather electrified belt and metal bell	2700K	1100mm 43.3"	1,3kg 2.8lb	
Vb8.621.53.27	black leather electrified belt and metal bell	2700K	2600mm 102.3"	1,4kg 3lb	
Vb8.621.54.27	soft taupe leather electrified belt and metal bell	2700K	2600mm 102.3"	1,4kg 3lb	

Ra	ies tm-30		sdc	mA	V _f (min)	lm	W	lm/W	
95	Rf 92	Rg 100	step 2	350	19,3	433	6,8	64	A
cd030	les6	Ta25 °C		vita media · average life		50000 h	180	B10	

***always include

Trimless cover for outlet box

Vb9.000.01.u	scomparsa totale cartongesso fully concealed for plasterboard installation	0,3kg 0.7lb
---------------------	--	-------------



3 fixtures wired in series max

alimentatori. power supplies.	120-277V 50-60Hz		damp	cUL us	i
t4.320.u	350mA	4-52V	18W	0,3kg 0.7lb	

