





The C2 Anelli is a continuation of Viabizzuno most famous extrusion

damp location rated suspension light fi tting for indoor use.
made of a 30x32mm/1.2x1.3'' extruded oxidised aluminium, calendered with internal light.
versions:
c2 anelli diameter Ø1060mm/41.7'' with two 3000mm/118.1'' suspension cables made of stainless steel and one 2x0,75mm² power cable,
c2 anelli diameter Ø2060mm/81.1'' with four pieces of 3000mm/118.1'' suspension cables made of stainless steel and two 2x0,75mm² power cable, equipped with frosted polycarbonate diffuser.
wired with 2700K Ra95 linear led source 87W and 168W.
120-277V 50-60Hz power supply not included, to be installed remotely.
fi nishes: argento hacca, ottone ap-s and marrone mn.

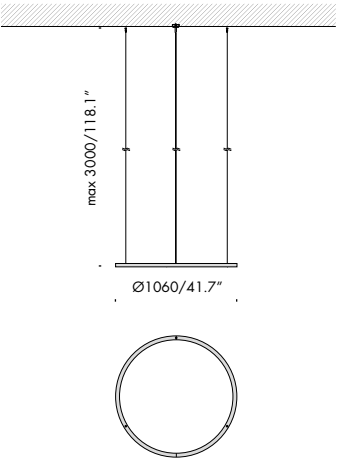


c2 anelli 1060		24Vdc		damp			
Vb8.616.01.27	argento hacca	2700K 87W	Ø1060mm	5kg	41.7''	11.2lb	
Vb8.616.02.27	ottone ap-s	2700K 87W	Ø1060mm	5kg	41.7''	11.2lb	
Vb8.616.03.27	marrone mn	2700K 87W	Ø1060mm	5kg	41.7''	11.2lb	


Ra	R9	ies tm-30		sdcm	V _f	lm/m	W/m	lm/W
95	90	Rf 90	Rg 98	step 2	24	2400	26	92
V3000	11	Ta25 °C		vita media · average life		50000 h	L80	B10

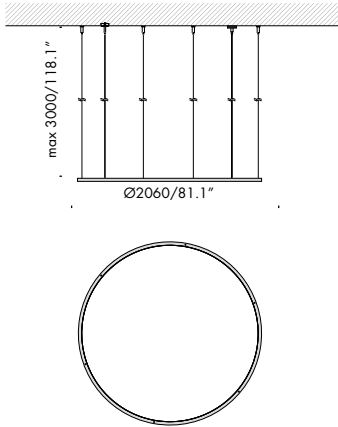


c2 anelli 2060		24Vdc		damp			
Vb8.616.11.27	argento hacca	2700K 168W	Ø2060mm	10kg	81.1''	22lb	
Vb8.616.12.27	ottone ap-s	2700K 168W	Ø2060mm	10kg	81.1''	22lb	
Vb8.616.13.27	marrone mn	2700K 168W	Ø2060mm	10kg	81.1''	22lb	

Ra	R9	ies tm-30		sdcm	V _f	lm/m	W/m	lm/W
95	90	Rf 90	Rg 98	step 2	24	2400	26	92
V3000	11	Ta25 °C		vita media · average life		50000 h	L80	B10

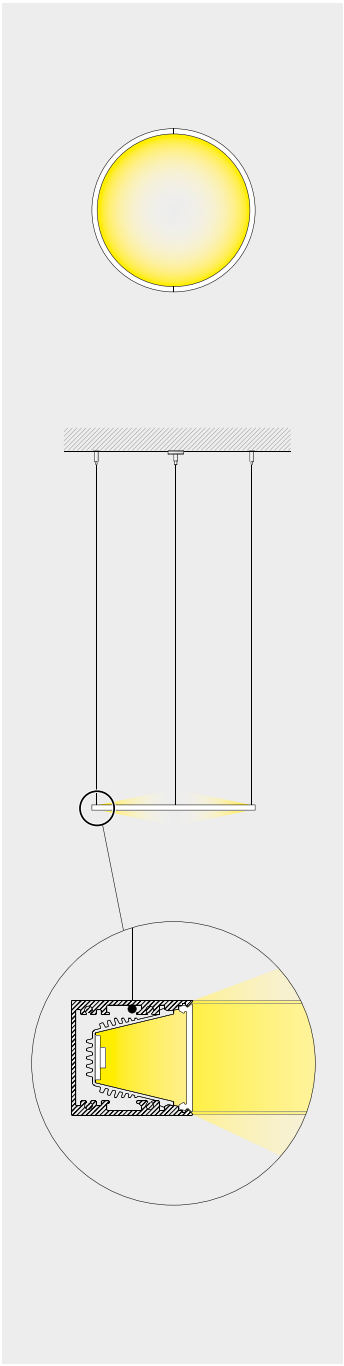




copertura per outlet box. cover for outlet box



Vb9.000.01.u scomparsa totale cartongesso
fully concealed for plasterboard installation

0,3kg
0.7lb



alimentatori. power supplies.

120-277V

damp



t4.630.u

24V dimm. 0-10V 96W 0,8kg
1.8lb



